

Model CT36EU 36" Unframed Electric Cooktop

With Wolf's unframed electric cooktops there's no stainless steel trim, just the sophisticated, minimalist exterior subtly patterned design to hide any unsightly scratches. Four heating elements with nine zones offer exceptional control of temperature for cooking utensils of every size. A bridge connects two elements for an 8-inch by 17-inch, 4400 watt heating area. All elements offer True Simmer along with one element that enables you to set the temperature for melting.



Features

- Can be mounted flush with top of countertop or as a frameless installation sitting on top of the countertop surface
- Easy-to-clean black ceramic glass surface is resistant to scratching, staining, impact and heat—translucent surface allows you to see the glow of hot elements
- High-frequency pulsation elements improve cooking performance and control
- Four heating elements with nine zones
- Bridge-zone element connects two elements to provide a larger cooking area
- Temperature limiter to ensure that safe operating temperature of ceramic glass is never exceeded
- Illuminated touch controls with graduated control lighting
- True Simmer setting on all elements
- Melt setting on one element
- Hot-surface indicator light in control panel
- Lock mode—cooktop can be locked so that no elements can be turned on
- Universal OFF turns all elements off
- Countdown timer with 1 to 99 minute range and adjustable sound frequency and volume

Model CT36EU

Design Unframed

Maximum Element Power

Triple-zone element power: 1050 W/2200 W/2700 W

Dual-zone element power: 700 W/2200 W

■ Single element power: 1200 W

Bridge-zone element power—
(2) 1800 W single elements with 800 W bridge: 4400 W



Model CT36EU

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.








Translucent Surface



Model CT36EU 36" Unframed Electric Cooktop

Overall Dimensions



Unit dimensions may vary by $\pm 1/8$ ".

Specifications

| Overall Width | | | | 36" | |
|---|--|----|---------------------|-------------------------------------|--|
| Overall Height | | | | 41/4" | |
| Overall Depth | | | | 21" | |
| Heating Element Outer Diame (1) Triple (1) Dual (3) Single | | | | 12" 9" and 6 ¹ /2" | |
| Bridge Element Dimensions | | | | 8" x 17" | |
| Recommended Cabinet Width 39" | | | | | |
| Minimum Cabinet Width | | | | 36" | |
| Minimum Cabinet Depth | | | | 223/4" | |
| Minimum Height Clearance* | | | | 41/2" | |
| Countertop Cut-Out 34 | | 34 | ³ /8" W | x 19 ³ /8" D | |
| Electrical Requirements | | | | / 50 amp / 40 amp | |
| Conduit 4' flexible 3-wire | | | | | |
| Electric Rating 1 | | | 10.5 kW at 240 V AC | | |

*Minimum 6¹/4" clearance is required between countertop and any combustible surface directly below the cooktop.

7.9 kW at 208 V AC


60 lbs

Installation Notes


Shipping Weight

Complete installation specifications can be found on our website, wolfappliance.com.

Installation Specifications

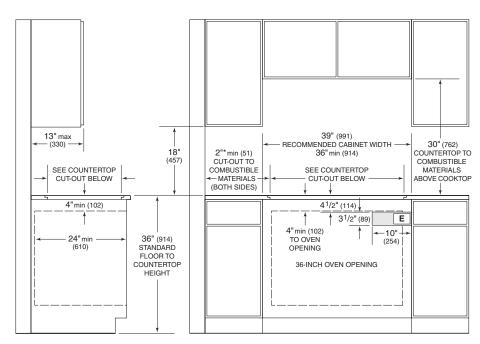

*Minimum clearance from both side edges and back edge of cooktop cut-out to combustible materials up to 18" (457) above countertop.

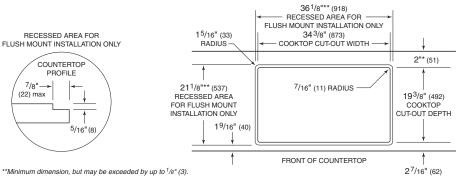

Dimensions in parentheses are in millimeters unless otherwise specified.